


## 室内灯具光度数据

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz		
实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

光源数据		光度数据				光效: 108.98 lm/W
型号		峰值光强(cd)	254.6	S/MH(C0/180)		1.37
标称功率(W)	9.4	灯具效率(%)	100.0	S/MH(C90/270)		1.29
额定电源电压(V)	12	总光通量(lm)	1024.4	$\eta$ UP, DN(C0-180)		2.5, 47.1
额定光通量(lm)	1024.42	CIE分类	直接	$\eta$ UP, DN(C180-360)		3.0, 47.4
灯具内光源数(只)	1	上射光通比(%)	5.5	CIBSE SHR NOM		1.50
实测电源电压(V)	12	下射光通比(%)	94.5	CIBSE SHR MAX		1.55

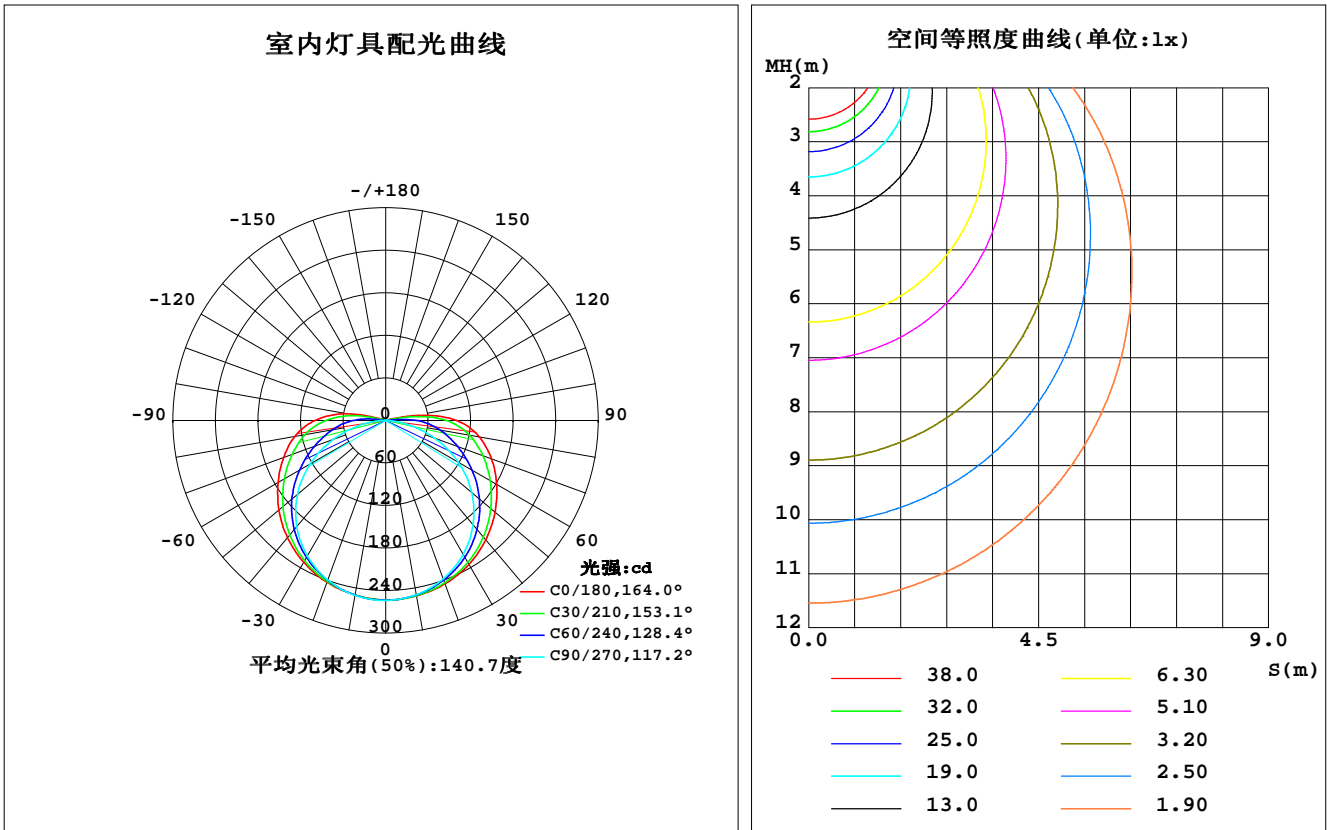

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3℃  
测试人员: DAMIN  
测试日期: 2023-11-03

Y角度范围: 0度 - 180度  
Y角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
环境湿度: 65.0%  
测试距离: 8.000米 [K=0.7125]  
备注:

## 灯具环带光通量

环带光通量:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	$\phi$ 环	$\phi$ 总	%lum, lamp
10	251.1	250.5	249.5	249.9	249.9	250.0	250.3	252.1	0- 10	24.06	24.06	2.35,2.35
20	245.2	241.7	237.6	239.8	242.8	240.7	239.4	244.1	10- 20	69.72	93.79	9.16,9.16
30	234.6	227.3	218.5	224.2	231.3	225.9	221.1	230.3	20- 30	108.4	202.2	19.7,19.7
40	219.8	207.5	191.9	203.3	215.6	205.7	195.3	211.1	30- 40	136.1	338.2	33,33
50	201.5	183.2	158.5	178.0	196.9	181.1	162.5	184.6	40- 50	150.1	488.3	47.7,47.7
60	180.9	155.5	118.4	149.2	175.4	152.7	123.2	157.2	50- 60	149.4	637.7	62.3,62.3
70	158.9	127.2	73.72	120.0	153.3	123.8	78.90	128.1	60- 70	135.9	773.7	75.5,75.5
80	134.0	98.85	28.78	92.19	130.2	95.90	33.29	92.16	70- 80	111.9	885.6	86.5,86.5
90	100.4	65.10	0.8115	60.74	99.74	65.01	2.493	67.17	80- 90	82.19	967.8	94.5,94.5
100	39.25	12.86	0.6792	16.40	55.38	21.32	1.364	17.75	90-100	44.29	1012	98.8,98.8
110	2.365	1.126	0.6300	0.9250	2.719	1.559	1.297	2.280	100-110	7.380	1019	99.5,99.5
120	0.9815	0.8470	0.6509	0.8716	1.575	1.445	1.293	1.680	110-120	1.276	1021	99.6,99.6
130	0.8820	0.7869	0.6977	0.8483	1.403	1.348	1.313	1.529	120-130	1.022	1022	99.7,99.7
140	0.9336	0.8495	0.7912	0.9438	1.356	1.352	1.338	1.494	130-140	0.8666	1023	99.8,99.8
150	0.9905	0.9371	0.8971	1.081	1.375	1.371	1.349	1.481	140-150	0.7349	1023	99.9,99.9
160	1.057	1.029	1.006	1.193	1.354	1.359	1.334	1.468	150-160	0.5630	1024	100,100
170	1.155	1.128	1.118	1.292	1.307	1.307	1.284	1.434	160-170	0.3550	1024	100,100
180	1.231	1.217	1.203	1.362	1.236	1.217	1.207	1.366	170-180	0.1206	1024	100,100
单位:°	光强:cd								单位:lm			

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3°C  
测试人员: DAMIN  
测试日期: 2023-11-03

$\gamma$ 角度范围: 0度 - 180度  
 $\gamma$ 角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
环境湿度: 65.0%  
测试距离: 8.000米 [K=0.7125]  
备注:

### 灯具亮度限制曲线

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz		
实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

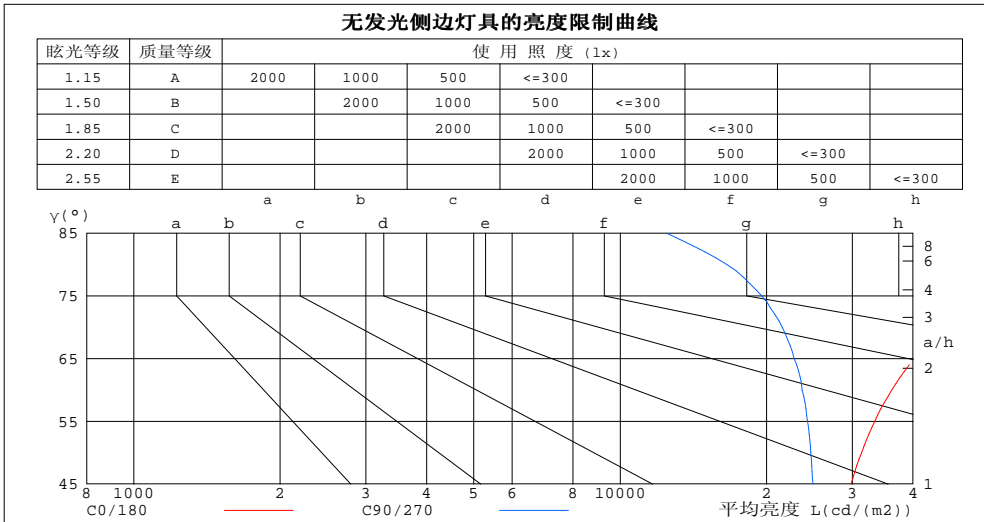

平均亮度值 cd/(m2)		
γ(°)	C0/180	C90/270
85	136378	12469
80	77139	16574
75	56774	19548
70	46446	21554
65	40264	22799
60	36185	23677
55	33368	24295
50	31344	24658
45	29836	24901


**C角度范围: 0度 - 360度**  
**C角度间隔: 30.0度**  
**测试速度: 快速**  
**环境温度: 25.3°C**  
**测试人员: DAMIN**  
**测试日期: 2023-11-03**

**γ角度范围: 0度 - 180度**  
**γ角度间隔: 1.0度**  
**测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443**  
**环境湿度: 65.0%**  
**测试距离: 8.000米 [K=0.7125]**  
**备注:**

### 工作面利用系数和灯具概算曲线

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz		
实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工作面利用系数															
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.94
1.0	.98	.92	.87	.95	.90	.85	.90	.85	.82	.85	.81	.78	.80	.77	.75	.72
2.0	.83	.75	.68	.81	.74	.67	.76	.70	.65	.72	.67	.62	.68	.64	.60	.57
3.0	.72	.63	.55	.70	.62	.55	.66	.59	.53	.63	.56	.51	.59	.54	.50	.47
4.0	.63	.54	.46	.62	.53	.45	.58	.50	.44	.55	.48	.43	.52	.47	.42	.39
5.0	.56	.46	.39	.55	.46	.39	.52	.44	.38	.49	.42	.37	.47	.41	.36	.33
6.0	.50	.41	.34	.49	.40	.33	.47	.39	.33	.44	.37	.32	.42	.36	.31	.29
7.0	.45	.36	.30	.44	.36	.29	.42	.34	.29	.40	.33	.28	.38	.32	.27	.25
8.0	.41	.32	.26	.40	.32	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.22
9.0	.38	.29	.23	.37	.29	.23	.35	.28	.23	.34	.27	.22	.32	.26	.22	.20
10.0	.35	.27	.21	.34	.26	.21	.33	.25	.21	.31	.25	.20	.30	.24	.20	.18

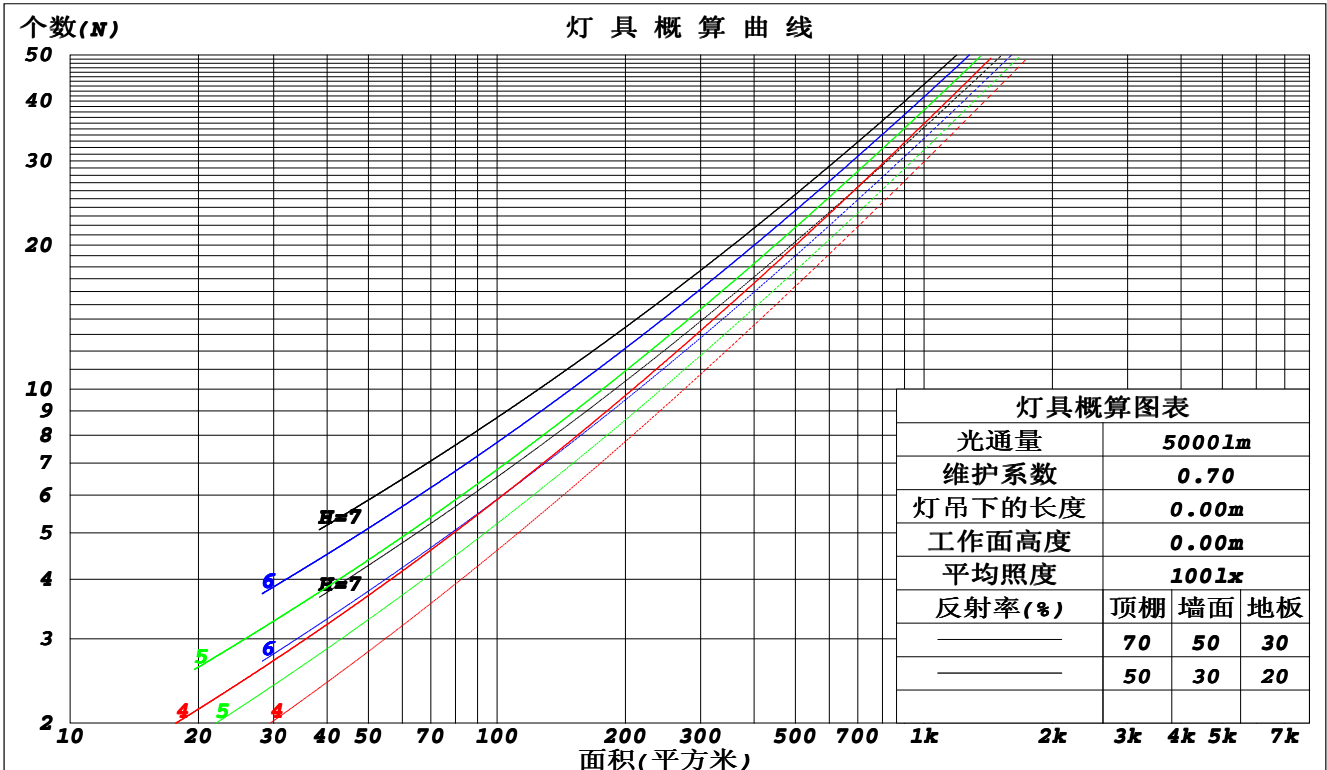

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3°C  
 测试人员: DAMIN  
 测试日期: 2023-11-03

Y角度范围: 0度 - 180度  
 Y角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
 环境湿度: 65.0%  
 测试距离: 8.000米 [K=0.7125]  
 备注:

### 墙面和天花板利用系数

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz												
实检光通: 1024.42x1 lm												
灯具名称: COB LED STRIP 9W 4000K IP20						灯具类型: LED						
制造厂商:												

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙壁面利用系数															
0.0																
1.0	.399	.227	.072	.390	.223	.071	.373	.214	.068	.358	.206	.066	.344	.199	.064	
2.0	.346	.190	.058	.338	.186	.057	.323	.179	.056	.309	.173	.054	.296	.167	.053	
3.0	.307	.163	.049	.300	.160	.048	.286	.155	.047	.274	.150	.046	.262	.145	.045	
4.0	.276	.143	.042	.269	.141	.042	.257	.136	.041	.246	.132	.040	.236	.128	.039	
5.0	.250	.127	.037	.244	.126	.037	.234	.122	.036	.224	.118	.035	.214	.114	.034	
6.0	.229	.115	.033	.224	.113	.033	.214	.110	.032	.205	.107	.031	.196	.103	.031	
7.0	.211	.104	.030	.206	.103	.029	.197	.100	.029	.189	.097	.028	.182	.094	.028	
8.0	.195	.095	.027	.191	.094	.027	.183	.092	.026	.176	.089	.026	.169	.087	.025	
9.0	.182	.088	.025	.178	.087	.024	.171	.085	.024	.164	.082	.024	.158	.080	.023	
10.0	.170	.082	.023	.167	.081	.022	.160	.078	.022	.154	.076	.022	.148	.074	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.233	.233	.233	.199	.199	.199	.136	.136	.136	.078	.078	.078	.025	.025	.025	
1.0	.229	.198	.170	.196	.170	.146	.134	.117	.101	.077	.068	.059	.025	.022	.019	
2.0	.222	.174	.134	.190	.150	.116	.130	.104	.081	.075	.060	.047	.024	.020	.015	
3.0	.215	.158	.112	.184	.136	.097	.126	.094	.068	.073	.055	.040	.023	.018	.013	
4.0	.207	.145	.098	.177	.125	.085	.122	.087	.060	.071	.051	.035	.023	.017	.012	
5.0	.199	.135	.088	.171	.117	.076	.117	.081	.054	.068	.048	.032	.022	.016	.011	
6.0	.191	.127	.080	.164	.110	.070	.113	.077	.050	.066	.045	.029	.021	.015	.010	
7.0	.184	.120	.075	.158	.104	.065	.109	.073	.046	.063	.043	.028	.020	.014	.009	
8.0	.177	.114	.071	.152	.099	.062	.105	.069	.044	.061	.041	.026	.020	.013	.009	
9.0	.170	.109	.068	.147	.095	.059	.102	.067	.042	.059	.039	.025	.019	.013	.008	
10.0	.164	.105	.065	.141	.091	.057	.098	.064	.041	.057	.038	.024	.019	.012	.008	

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2023-11-03

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
 环境湿度: 65.0%  
 测试距离: 8.000米 [K=0.7125]  
 备注:

### UGR(Unified Glare Rating)数据表

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz 实检光通: 1024.42x1 lm										
灯具名称: COB LED STRIP 9W 4000K IP20					灯具类型: LED					
制造厂商:										
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
<b>x = 2H y = 2H</b>	<b>24.3</b>	<b>26.0</b>	<b>24.8</b>	<b>26.4</b>	<b>26.9</b>	<b>22.3</b>	<b>23.9</b>	<b>22.7</b>	<b>24.3</b>	<b>24.8</b>
<b>3H</b>	<b>27.4</b>	<b>28.9</b>	<b>27.8</b>	<b>29.3</b>	<b>29.8</b>	<b>24.1</b>	<b>25.6</b>	<b>24.6</b>	<b>26.1</b>	<b>26.6</b>
<b>4H</b>	<b>28.9</b>	<b>30.4</b>	<b>29.4</b>	<b>30.8</b>	<b>31.3</b>	<b>24.8</b>	<b>26.2</b>	<b>25.3</b>	<b>26.7</b>	<b>27.2</b>
<b>6H</b>	<b>30.6</b>	<b>31.9</b>	<b>31.1</b>	<b>32.4</b>	<b>32.9</b>	<b>25.3</b>	<b>26.6</b>	<b>25.8</b>	<b>27.1</b>	<b>27.6</b>
<b>8H</b>	<b>31.5</b>	<b>32.8</b>	<b>32.0</b>	<b>33.3</b>	<b>33.8</b>	<b>25.4</b>	<b>26.7</b>	<b>25.9</b>	<b>27.2</b>	<b>27.7</b>
<b>12H</b>	<b>32.5</b>	<b>33.7</b>	<b>33.0</b>	<b>34.2</b>	<b>34.8</b>	<b>25.5</b>	<b>26.7</b>	<b>26.0</b>	<b>27.2</b>	<b>27.8</b>
<b>4H</b>	<b>25.0</b>	<b>26.4</b>	<b>25.5</b>	<b>26.9</b>	<b>27.4</b>	<b>23.4</b>	<b>24.8</b>	<b>23.9</b>	<b>25.3</b>	<b>25.8</b>
<b>3H</b>	<b>28.3</b>	<b>29.6</b>	<b>28.8</b>	<b>30.1</b>	<b>30.6</b>	<b>25.6</b>	<b>26.8</b>	<b>26.1</b>	<b>27.3</b>	<b>27.9</b>
<b>4H</b>	<b>30.1</b>	<b>31.3</b>	<b>30.6</b>	<b>31.8</b>	<b>32.3</b>	<b>26.5</b>	<b>27.6</b>	<b>27.0</b>	<b>28.2</b>	<b>28.7</b>
<b>6H</b>	<b>32.0</b>	<b>33.0</b>	<b>32.6</b>	<b>33.6</b>	<b>34.1</b>	<b>27.2</b>	<b>28.2</b>	<b>27.7</b>	<b>28.7</b>	<b>29.3</b>
<b>8H</b>	<b>33.0</b>	<b>34.0</b>	<b>33.6</b>	<b>34.5</b>	<b>35.1</b>	<b>27.4</b>	<b>28.4</b>	<b>27.9</b>	<b>28.9</b>	<b>29.5</b>
<b>12H</b>	<b>34.2</b>	<b>35.1</b>	<b>34.7</b>	<b>35.6</b>	<b>36.2</b>	<b>27.5</b>	<b>28.4</b>	<b>28.1</b>	<b>29.0</b>	<b>29.6</b>
<b>8H</b>	<b>30.6</b>	<b>31.5</b>	<b>31.1</b>	<b>32.1</b>	<b>32.7</b>	<b>27.6</b>	<b>28.6</b>	<b>28.2</b>	<b>29.1</b>	<b>29.7</b>
<b>6H</b>	<b>32.8</b>	<b>33.6</b>	<b>33.3</b>	<b>34.2</b>	<b>34.8</b>	<b>28.7</b>	<b>29.5</b>	<b>29.3</b>	<b>30.1</b>	<b>30.7</b>
<b>8H</b>	<b>34.0</b>	<b>34.7</b>	<b>34.6</b>	<b>35.3</b>	<b>35.9</b>	<b>29.1</b>	<b>29.9</b>	<b>29.7</b>	<b>30.4</b>	<b>31.1</b>
<b>12H</b>	<b>35.4</b>	<b>36.1</b>	<b>36.0</b>	<b>36.7</b>	<b>37.3</b>	<b>29.4</b>	<b>30.1</b>	<b>30.0</b>	<b>30.7</b>	<b>31.3</b>
<b>12H</b>	<b>30.6</b>	<b>31.5</b>	<b>31.2</b>	<b>32.1</b>	<b>32.7</b>	<b>28.0</b>	<b>28.9</b>	<b>28.6</b>	<b>29.5</b>	<b>30.0</b>
<b>6H</b>	<b>32.9</b>	<b>33.7</b>	<b>33.5</b>	<b>34.2</b>	<b>34.9</b>	<b>29.3</b>	<b>30.0</b>	<b>29.9</b>	<b>30.6</b>	<b>31.2</b>
<b>8H</b>	<b>34.3</b>	<b>34.9</b>	<b>34.9</b>	<b>35.5</b>	<b>36.2</b>	<b>29.9</b>	<b>30.6</b>	<b>30.5</b>	<b>31.2</b>	<b>31.8</b>
<b>CIE190: 2010</b>										

CIE190: 2010基于光强分布和理想模拟环境的眩光评价  
 出光口面积: 0.01 m<sup>2</sup>

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3°C  
 测试人员: DAMIN  
 测试日期: 2023-11-03

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
 环境湿度: 65.0%  
 测试距离: 8.000米 [K=0.7125]  
 备注:

## UF利用系数表

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz 实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	51	38	31	50	38	31	49	37	31	24
0.80	60	47	39	59	47	39	57	46	38	31
1.00	68	55	47	67	55	47	64	56	46	38
1.25	75	63	54	73	62	54	70	60	53	44
1.50	80	68	60	78	67	59	75	65	58	49
2.00	87	77	68	85	75	68	81	72	66	56
2.50	92	82	74	89	80	73	85	77	71	61
3.00	95	86	79	93	85	78	88	81	75	65
4.00	100	92	86	97	90	84	92	86	81	70
5.00	103	96	91	100	94	89	95	90	85	74
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯			安装距高比 $S/RNOM = 1.25$				

**C**角度范围: 0度 - 360度  
**C**角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2023-11-03

**γ**角度范围: 0度 - 180度  
**γ**角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
 环境湿度: 65.0%  
 测试距离: 8.000米 [ $K=0.7125$ ]  
 备注:

### 灯具等光强曲线

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz 实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

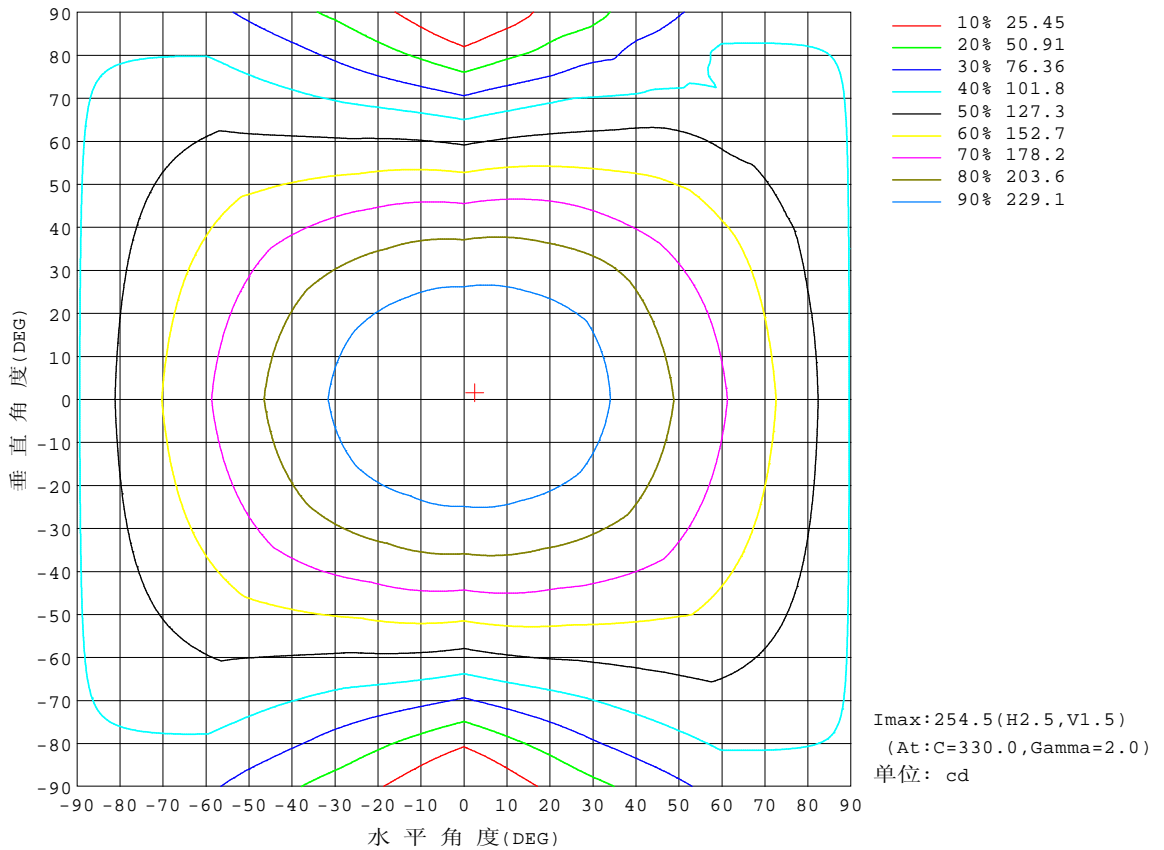

**C角度范围: 0度 - 360度**  
**C角度间隔: 30.0度**  
**测试速度: 快速**  
**环境温度: 25.3℃**  
**测试人员: DAMIN**  
**测试日期: 2023-11-03**


**γ角度范围: 0度 - 180度**  
**γ角度间隔: 1.0度**  
**测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443**  
**环境湿度: 65.0%**  
**测试距离: 8.000米 [K=0.7125]**  
**备注:**



## 灯具有效平均照度图

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz		
实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

光通输出:623.2 lm

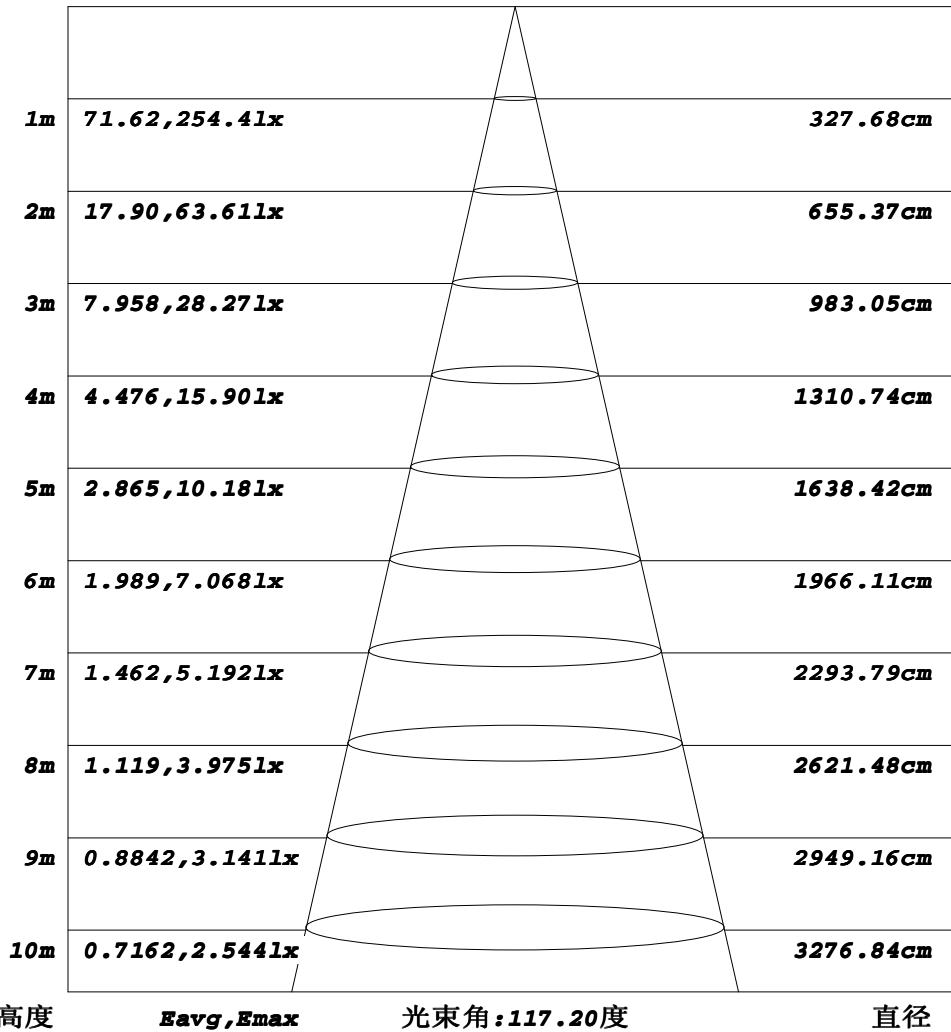


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2023-11-03

Y角度范围: 0度 - 180度  
 Y角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
 环境湿度: 65.0%  
 测试距离: 8.000米 [K=0.7125]  
 备注:

### 平面等照度曲线


实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz		
实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

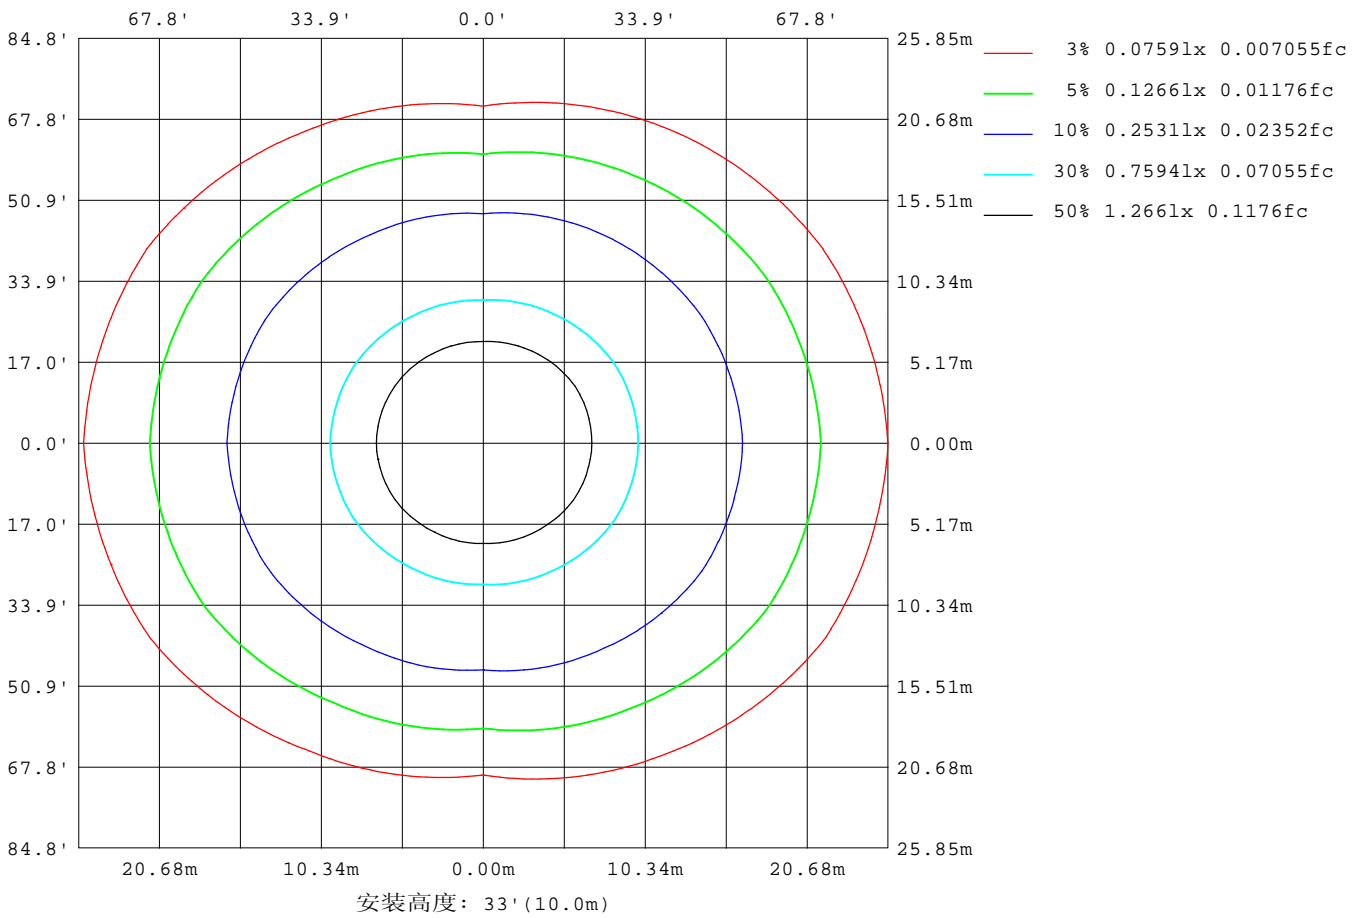

**C角度范围: 0度 - 360度**  
**C角度间隔: 30.0度**  
**测试速度: 快速**  
**环境温度: 25.3°C**  
**测试人员: DAMIN**  
**测试日期: 2023-11-03**

**Y角度范围: 0度 - 180度**  
**Y角度间隔: 1.0度**  
**测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443**  
**环境湿度: 65.0%**  
**测试距离: 8.000米 [K=0.7125]**  
**备注:**

## 平面照度曲线

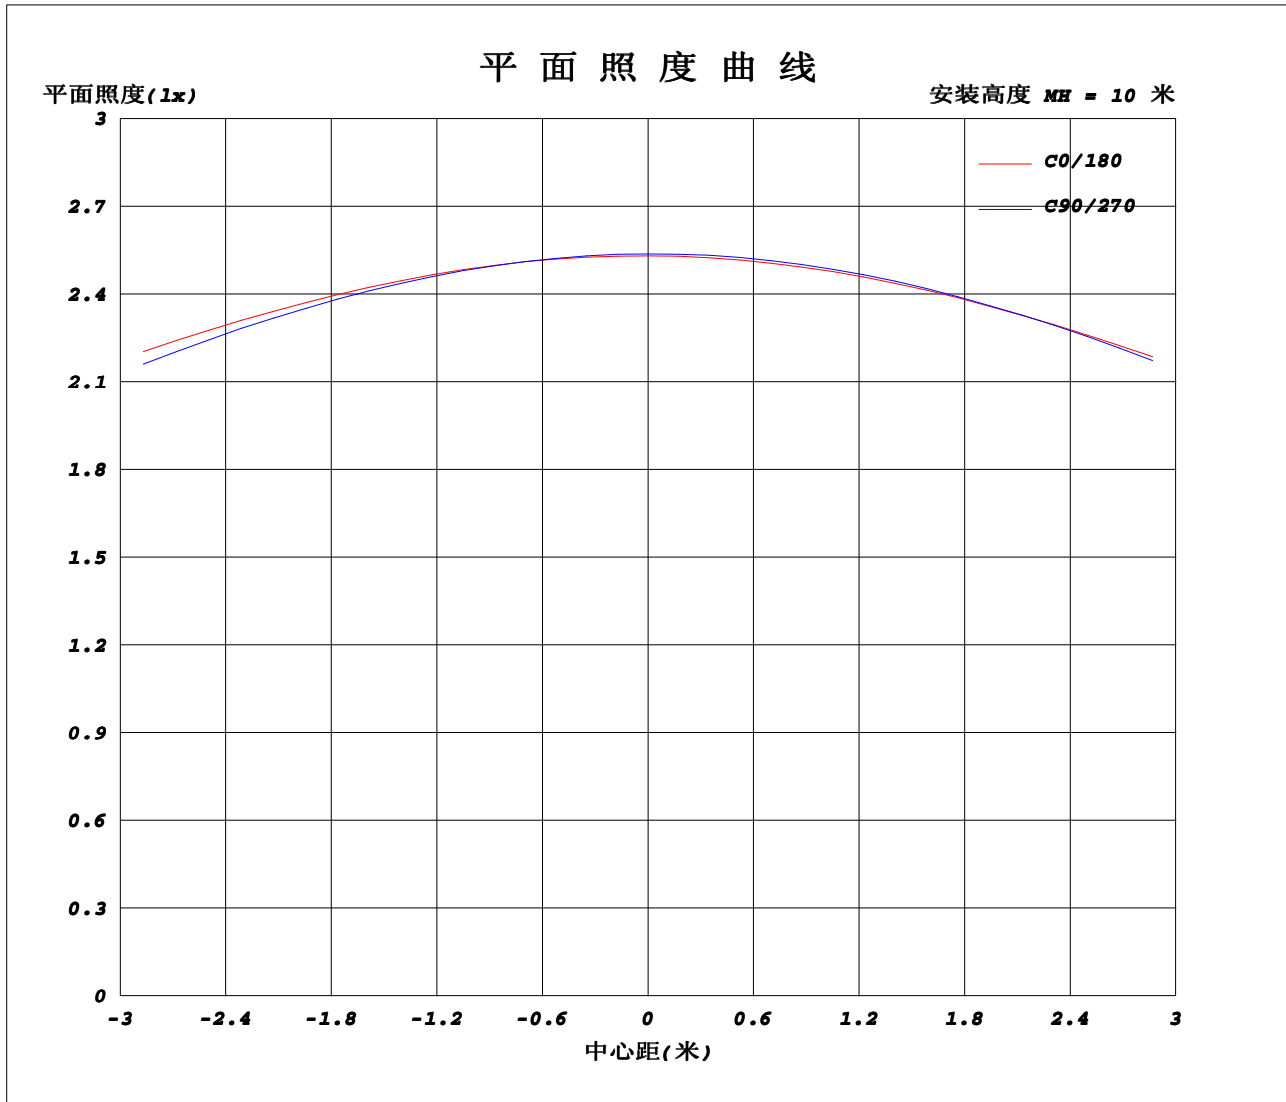

C角度范围: 0度 - 360度  
C角度间隔: 30.0度  
测试速度: 快速  
环境温度: 25.3°C  
测试人员: DAMIN  
测试日期: 2023-11-03

Y角度范围: 0度 - 180度  
Y角度间隔: 1.0度  
测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
环境湿度: 65.0%  
测试距离: 8.000米 [K=0.7125]  
备注:

光强分布数据表格

实测参数: U:12.000V I:0.7830A P:9.4000W PF:1.0000 Freq:0Hz 实检光通: 1024.42x1 lm		
灯具名称: COB LED STRIP 9W 4000K IP20	灯具类型: LED	
制造厂商:		

表--1

单位: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	253	253	254	254	254	254	253	253	254	254	254	254							
5	253	253	253	253	253	253	252	252	253	253	254	254							
10	251	251	250	250	250	250	250	250	250	250	252	253							
15	249	248	246	244	245	246	247	246	246	246	248	250							
20	245	244	240	238	238	241	243	242	240	239	242	246							
25	240	238	232	229	230	235	238	236	232	231	235	241							
30	235	231	223	218	221	228	231	229	223	221	226	234							
35	228	224	213	206	210	219	224	220	213	209	216	226							
40	220	214	201	192	197	210	216	211	201	195	205	218							
45	211	204	187	176	183	199	207	200	187	180	192	207							
50	201	194	173	158	168	188	197	189	173	163	178	192							
55	191	182	157	139	152	175	186	177	157	144	162	180							
60	181	170	141	118	136	163	175	165	141	123	145	169							
65	170	158	124	96.4	119	150	164	153	124	102	129	156							
70	159	146	108	73.7	102	138	153	140	107	78.9	112	144							
75	147	133	92.9	50.6	86.2	126	142	128	91.3	55.7	91.7	123							
80	134	120	77.6	28.8	71.2	113	130	116	76.2	33.3	75.1	109							
85	119	105	62.0	10.9	56.8	98.2	116	101	61.7	14.2	61.0	105							
90	100	86.1	44.1	0.81	40.4	81.1	99.7	84.5	45.5	2.49	45.0	89.3							
95	74.1	60.4	16.6	0.72	19.0	60.3	80.0	64.7	27.8	1.41	25.2	65.8							
100	39.3	24.3	1.42	0.68	1.00	31.8	55.4	39.3	3.33	1.36	3.14	32.4							
105	7.46	3.19	0.87	0.65	0.79	3.65	21.4	7.91	1.50	1.32	1.81	5.86							
110	2.37	1.42	0.83	0.63	0.78	1.07	2.72	1.67	1.45	1.30	1.62	2.94							
115	1.20	1.00	0.79	0.64	0.78	1.01	1.66	1.59	1.40	1.29	1.55	2.06							
120	0.98	0.93	0.76	0.65	0.78	0.96	1.58	1.53	1.36	1.29	1.48	1.89							
125	0.91	0.86	0.74	0.68	0.77	0.92	1.50	1.45	1.32	1.30	1.42	1.75							
130	0.88	0.83	0.75	0.70	0.79	0.91	1.40	1.38	1.32	1.31	1.40	1.66							
135	0.90	0.86	0.77	0.73	0.82	0.96	1.36	1.35	1.33	1.33	1.40	1.62							
140	0.93	0.90	0.80	0.79	0.86	1.03	1.36	1.37	1.34	1.34	1.40	1.58							
145	0.96	0.93	0.86	0.84	0.94	1.10	1.37	1.38	1.35	1.35	1.41	1.57							
150	0.99	0.97	0.90	0.90	0.99	1.17	1.38	1.38	1.36	1.35	1.40	1.57							
155	1.02	1.02	0.95	0.95	1.05	1.21	1.37	1.38	1.36	1.34	1.39	1.56							
160	1.06	1.05	1.00	1.01	1.09	1.30	1.35	1.37	1.34	1.33	1.38	1.56							
165	1.11	1.10	1.06	1.06	1.14	1.35	1.34	1.35	1.33	1.32	1.37	1.54							
170	1.15	1.15	1.11	1.12	1.19	1.39	1.31	1.33	1.29	1.28	1.35	1.52							
175	1.20	1.19	1.16	1.17	1.24	1.43	1.26	1.27	1.24	1.24	1.29	1.48							
180	1.23	1.23	1.21	1.20	1.28	1.45	1.24	1.23	1.20	1.21	1.27	1.46							

C角度范围: 0度 - 360度  
 C角度间隔: 30.0度  
 测试速度: 快速  
 环境温度: 25.3℃  
 测试人员: DAMIN  
 测试日期: 2023-11-03

γ角度范围: 0度 - 180度  
 γ角度间隔: 1.0度  
 测试系统: 远方(EVERFINE)GO-2000A\_V1系统 V2.00.443  
 环境湿度: 65.0%  
 测试距离: 8.000米 [K=0.7125]  
 备注: