


INDUSTRIAL LED FIXTURE HIGH-BAY UFO



HB-100N • HB-100Z • HB-150N • HB-150Z • HB-200N • HB-200Z

Please take time to read this leaflet carefully and retain it for future reference.

Diagram:

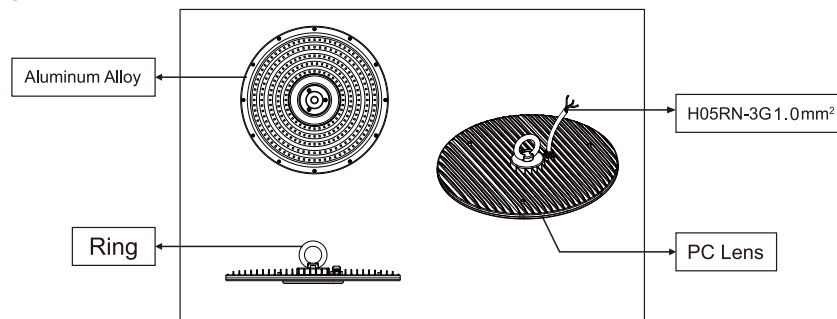

Specification:

Voltage	AC220-240V 50/60Hz		
Power factor	>0.9		
Wattage	100W	150W	200W
Lumen	10000lm	15000lm	20000lm
Lamp type	SMD2835		
CRI	>80		
Material	Aluminum Alloy		
Beam angle	90°		
Products siz	Φ 280x30mm	Φ 340x30mm	Φ 400x30mm
Color Temp	4000K/6500K		
Work Temp	-20° — +50°		
Housing color	Grey		

Important Safety Information


Do not wire this lantern into the lighting circuit - use a switched fuse spur.
Before installation and servicing, disconnect the electrical supply at the mains.
Carefully observe all instructions or warnings that are labelled on, or supplied with, your product.
This product is suitable for industrial use. If in any doubt, consult a qualified electrician.

General Information

Do not mount ceiling/wall fittings onto damp surfaces such as newly painted or plastered areas as this may cause discolouration of the finish.

Tools which may be required:

- Drill
- Cross Head Screwdriver
- Small Electrical Slotted Screwdriver
- Insulation Tape

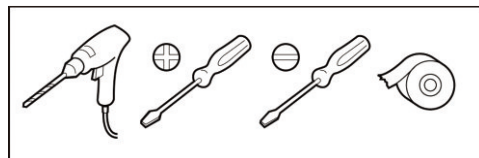


Fixing instructions

Do not wire this lantern into the lighting circuit - use a switched fuse spur.
This fitting must be earthed. contact a qualified electrician to install a suitable earth facility.
Ensure the electricity is turned off at the mains before installing or maintaining any electrical fitting.
Please note: For new installations, check for any electrical cables or pipe work (gas/water) in the vicinity of the intended mounting point for this product, before proceeding with the installation.

Installation:


Note: before installation.

Only use a **round cable supplied** to connect this fitting. (6mm Diameter minimum.)




This is required in order to create a good water seal when connected to the fitting.

1-Install the ring with the light body.



2-Connect the Main Line to the power wire of the lamp.



3-Ensure the terminal connection is made inside a suitable IP65 rated junction box.(not included)


From Floodlight

From IP65 Rated Junction Box

L = Brown
⊕ = Green/Yellow
N = Blue

L = Brown or Red
⊕ = Green/Yellow
N = Blue or Black

4-Install the LED High bay lights on the roof , ceiling.



This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)

UK
CA



Produced in P.R.C.
ECO LIGHT Sp. z o.o. 2a Działkowa Street, 62-872 Borek, Poland
www.ecolight.pl


OPRAWA PRZEMYSŁOWA LED HIGH-BAY UFO



HB-100N • HB-100Z • HB-150N • HB-150Z • HB-200N • HB-200Z

Prosimy o uważne przeczytanie tej instrukcji i zachowanie jej na przyszłość.

Schemat:

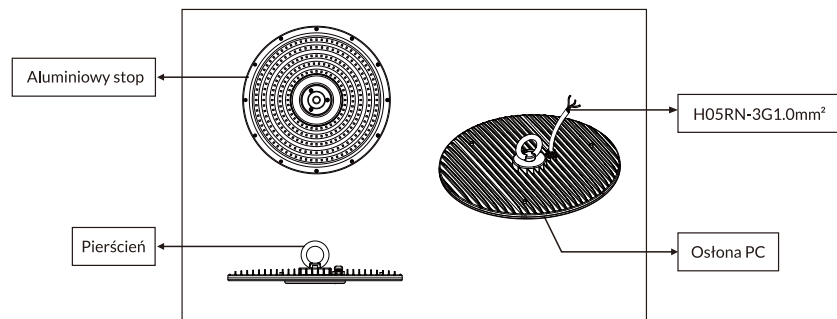

Specyfikacja:

Napięcie	AC220-240V 50/60Hz		
Współczynnik mocy	>0.9		
Moc	100W	150W	200W
Lumen	10000lm	15000lm	20000lm
Typ lampy	SMD2835		
CRI	>80		
Materiał	Stop aluminiowy		
Kąt świecenia	90°		
Rozmiar produktu	Φ 280x30mm	Φ 340x30mm	Φ 400x30mm
Barwa	4000K/6500K		
Temperatura pracy	-20° — +50°		
Kolor obudowy	Szary		

Informacje dotyczące bezpieczeństwa


Nie podłączaj lampy do obwodu oświetleniowego - użyj przełącznika.
Przed instalacją i serwisowaniem należy odłączyć zasilanie elektryczne od sieci.
Uważnie czytaj wszystkie instrukcje i ostrzeżenia, które znajdują się na produkcie lub są do niego dołączone.
Ten produkt nadaje się do użytku przemysłowego. W razie jakichkolwiek wątpliwości skonsultuj się z wykwalifikowanym elektrykiem

Informacje ogólne

Nie montuj opraw sufitowych/ściennych na wilgotnych powierzchniach, takich jak świeżo pomalowane lub otynkowane powierzchnie, ponieważ może to spowodować odbarwienie wykończenia.

Narzędzia, które będą potrzebne:

- Wiertarka
- Śrubokręt krzyżakowy
- Mały płaski wkrętak elektryczny
- Taśma izolacyjna

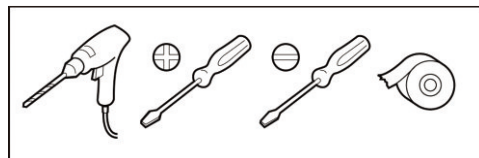


Instrukcja montażu

Nie podłączaj lampy do obwodu oświetleniowego - użyj przełącznika.
Ta oprawa musi być uziemiona. Skontaktuj się z wykwalifikowanym elektrykiem w celu zainstalowania odpowiedniego urządzenia uziemiającego. Upewnij się, że prąd jest wyłączony w sieci przed instalacją lub konserwacją jakiegokolwiek osprzętu elektrycznego. Uwaga: W przypadku nowych instalacji, przed przystąpieniem do instalacji należy sprawdzić, czy w pobliżu zamierzonego punktu mocowania tego produktu nie ma żadnych kabli elektrycznych lub instalacji rurowych

Instalacja:


Uwaga: przed instalacją.

Do podłączenia tego złącza należy używać **wyłącznie** dostarczonego okrągłego kabla. (minimum 6 mm średnicy).




Jest to wymagane, aby zapewnić dobre uszczelnienie po podłączeniu do złączki.


1-Zainstaluj pierścienie na korpusie lampy




2-Podłącz główną linię do przewodu zasilającego lampy



3-Upewnij się, że połączenie zaciskowe jest wykonane w odpowiedniej skrzynce przyłączeniowej o stopniu ochrony IP65. (nie zawarty)

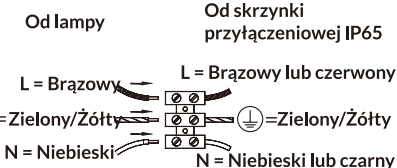

4-Zamontuj lampę LED High bay na dachu, suficie



Ten produkt należy zutylizować w sposób odpowiedzialny po zakończeniu jego eksploatacji.
Proszę oddać do recyklingu tam, gdzie istnieją urządzenia. Skontaktuj się z władzami lokalnymi lub sprzedawcą, aby uzyskać porady dotyczące recyklingu.
(Dyrektywa w sprawie zużytego sprzętu elektrycznego i elektronicznego)

UK
CA



Wyprodukowano w P.R.C.
ECO LIGHT Sp. z o.o. ul. Działkowa 2a, 62-872 Borek, Polska
www.ecolight.pl